

# 0 601 216 1F8 – GSB 500 RE



|                 |               |
|-----------------|---------------|
| Material number | 0 601 216 1F8 |
| EAN             | 3165140709132 |
| Tool box        | ✓             |
| 2 609 160 136   |               |



## Technical data

### Technical data

|                                 |             |
|---------------------------------|-------------|
| Rated input power               | 450 W       |
| No-load speed, 1st gear         | 0 rpm       |
| Power output                    | 250 W       |
| Weight                          | 1.5 kg      |
| Drill spindle connecting thread | 3/8"-24 UNF |
| Chuck capacity, min./max.       | 1.5 – 10 mm |
| Tool dimensions (width)         | 69 mm       |
| Tool dimensions (length)        | 262 mm      |
| Tool dimensions (height)        | 180 mm      |
| Impact rate at no-load speed    | 0 bpm       |
| Voltage, electrical             | 220–230 V   |

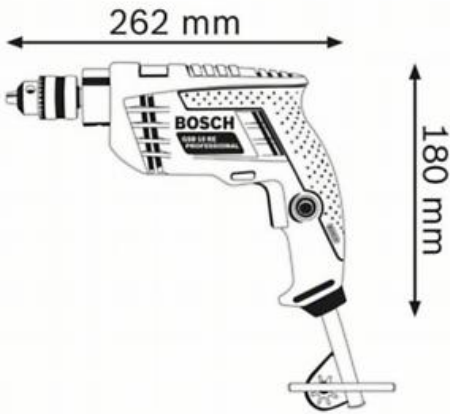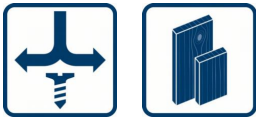

### Drilling range

|                               |       |
|-------------------------------|-------|
| Drilling diameter in concrete | 10 mm |
| Drilling diameter in wood     | 20 mm |
| Drilling diameter in steel    | 8 mm  |

### Noise/vibration information

|             |   |
|-------------|---|
| Noise level | The A-rated noise level of the power tool is typically as follows: Sound pressure level dB(A); Sound power level dB (A). Uncertainty K= dB. |
|-------------|---|



## Sales information

---

### Positioning

- Compactness and power redefined in this class

### User benefit

- Robust and powerful 500 W motor
- Extremely compact for working in tight spaces and overhead
- Low weight of only 1.5 kg for fatigue-free working