

# 0 601 2A6 4F0 – GHG 20-60

Material number	0 601 2A6 4F0
EAN	4059952570419
Cardboard box	✓



## Technical data

### Technical data



Rated input power	2.000 W
Weight	0,6 kg
Tool dimensions (width)	74 mm
Tool dimensions (length)	340 mm
Tool dimensions (height)	97 mm
Cold stage, 50°C	✓
Product category subdivision	Heat Gun

### Specifications, use

Working temperature	50 – 630 °C
Airflow	150 – 500 l/min
Continuously variable temperature control	✓
Control, airflow	2

### Noise/vibration information

Sound pressure level	65 dB(A)
Sound power level	76 dB(A)
Uncertainty K	3 dB
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 65 dB(A); Sound power level 76 dB(A). Uncertainty K= 3 dB.

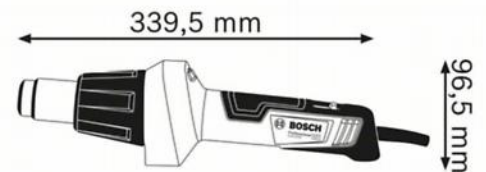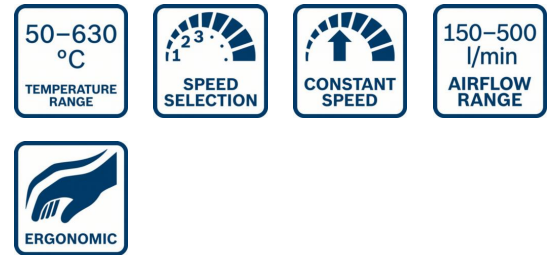

## Sales information

### Positioning

- The universal heat gun

### User benefit

- The universal tool for stripping paints and varnishes, for forming and shrinking with hot air. Also suitable for soldering, welding and tin-plating work
- Continuously variable temperature control with setting wheel
- Removable heat shield for work in tight spaces

