


Material number	0 601 513 0F0
EAN	3165140463690
3 x saw blade	✓
Anti-splinter guard 2 601 016 096	✓
Carrying case 2 605 438 685	✓
Dust extraction set	✓
Glide shoe 2 601 099 183	✓



Technical data

Technical data

Rated input power	780 W
Stroke rate at no load	500 – 3,100 spm
Weight	2,7 kg
Cable length	4 m
Tool dimensions (width)	79 mm
Tool dimensions (length)	316 mm
Tool dimensions (height)	214 mm
Cutting depth in steel	10 mm
Product category subdivision	Jigsaw

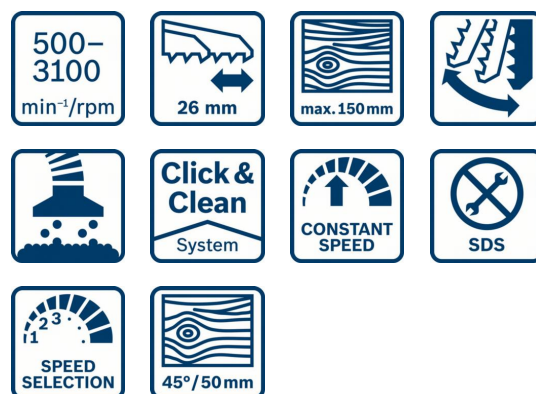

Cutting depth

Cutting depth in wood	150 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed steel	10 mm

Noise/vibration information

Sound pressure level	83 dB(A)
Sound power level	94 dB(A)
Uncertainty K	5 dB
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 83 dB(A); Sound power level 94 dB(A). Uncertainty K= 5 dB.



Sales information

Positioning

- The most powerful tool in its price class

User benefit

- High power reserves, even in hard and thick beams, due to powerful and overload-capable 780-watt motor
- Extremely robust and bend-resistant sole plate for the toughest jobs
- High cutting precision due to new saw blade clamping system

