

0 601 9F8 1K0 – GSR 180-LI

| | |
|--|---------------|
| Material number | 0 601 9F8 1K0 |
| EAN | 3165140879958 |
| 2 x battery GBA 18V 2.0Ah 1 600 Z00 036 | ✓ |
| Carrying case | ✓ |
| Charger GAL 18V-20 Professional | ✓ |



Technical data

Technical data

| | |
|-------------------------------------|-------------------------|
| Torque (soft/hard/max.) | 21/54/- Nm |
| No-load speed (1st gear / 2nd gear) | 0 – 500 / 0 – 1,900 rpm |
| Battery type | Lithium-ion |
| Chuck capacity, min./max. | 1.5 / 13 mm |
| Battery voltage | 18.0 V |
| Torque settings | 20+1 |
| Tool dimensions (width) | 62 mm |
| Tool dimensions (length) | 198 mm |
| Tool dimensions (height) | 225 mm |
| Battery capacity | 2,0 Ah |
| Product category subdivision | Cordless Drill/Driver |

Drilling diameter


| | |
|---------------------------------|-------|
| Max. drilling diameter in wood | 35 mm |
| Max. drilling diameter in steel | 10 mm |

Screw diameter

| | |
|---------------------|-------|
| Max. screw diameter | 10 mm |
|---------------------|-------|

Noise/vibration information

| | |
|----------------------|--|
| Sound pressure level | 88 dB(A) |
| Sound power level | 99 dB(A) |
| Uncertainty K | 5 dB |
| Noise level | The A-rated noise level of the power tool is typically as follows: Sound pressure level 88 dB(A); Sound power level 99 dB(A). Uncertainty K= 5 dB. |

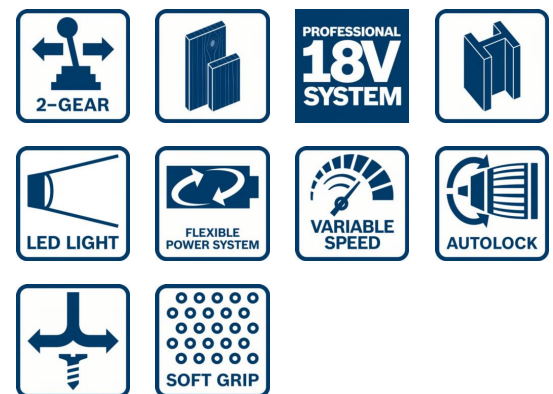

Sales information

Positioning

- More power. More Robust.

