

0 601 9G8 0F0 – GSR 120-LI


Material number	0 601 9G8 0F0
EAN	3165140955812
2 x battery GBA 12V 2.0Ah 1 600 Z00 02X	✓
Carrying case	✓
Charger GAL 1210 CV Professional	✓



Technical data

Technical data

Torque (soft/hard/max.)	14/30/- Nm
No-load speed (1st gear / 2nd gear)	0 – 400 / 0 – 1,500 rpm
Battery type	Lithium-ion
Chuck capacity, min./max.	0.8 / 10 mm
Weight excl. battery	0.8 kg
Torque settings	20+1
Tool dimensions (width)	53 mm
Tool dimensions (length)	170 mm
Tool dimensions (height)	188 mm
Battery capacity	1,5 Ah
Product category subdivision	Cordless Drill/Driver

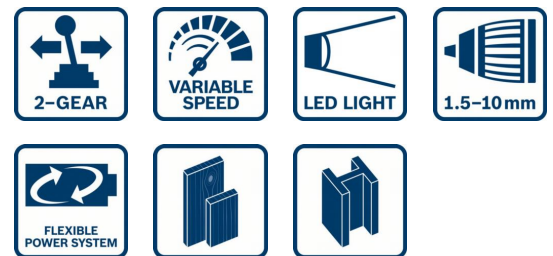

Drilling diameter

Max. drilling diameter in wood	20 mm
Max. drilling diameter in steel	10 mm

Screw diameter

Max. screw diameter	8 mm
---------------------	------

Noise/vibration information

Sound pressure level	67 dB(A)
Sound power level	78 dB(A)
Uncertainty K	3 dB
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 67 dB(A); Sound power level 78 dB(A). Uncertainty K= 3 dB.

Sales information

Positioning

- High-powered 2-in-1 for less

User benefit

- Power and durability within reach for screwdriving and drilling
- 2-speed gearbox enables high productivity and excellent torque
- Electronic Cell Protection for longer battery life and more durability

