

IRX-67
INDUSTRIAL PYROMETER
NON-CONTACT INFRARED THERMOMETER




Performance with Precision



FEATURES :

- ✓ PRECISE IR AND TK TEMPERATURE MEASUREMENT
- ✓ BUILT IN LASER CIRCLE WITH 13 LASER SPOTS INCREASE THE TARGET ACCURACY
- ✓ SD CARD TO STORE DATA, FORMAT: CSV
- ✓ °C OR °F SELECTION
- ✓ TRIGGER LOCK
- ✓ ADJUSTABLE EMISSIVITY : 0.1~1.0
- ✓ MAX, MIN, DIF, AVG RECORD
- ✓ LCD DISPLAY WITH BACKLIGHT
- ✓ ADJUSTABLE HIGH / LOW ALARM
- ✓ DATA HOLD FUNCTION
- ✓ USB INTERFACE
- ✓ AUTO POWER OFF

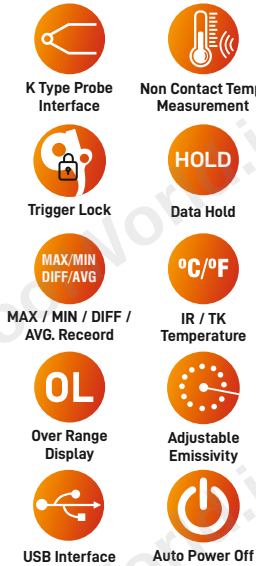

TECHNICAL DATA :

RANGE	IR	-50°C~1380°C / -58°F~2516°F
	TK	-50°C~1370°C / -58°F~2498°F
ACCURACY	IR : -50°C~0°C/-58°F~32°F : ±4°C/7.2°F IR : 0°C~500°C/-58°F~932°F : ±1.5%±2°C/3.6°F ABOVE 500°C~932°F : ±2.0% ±2°C/3.6°F TK : -50°C~1370°/-58°F~2498°F : ±1.5% or READING ±1°C/1.8°F	
RESOLUTION	0.1°C(0.1°F) <1000, 1°C(1°F)>1000	
DISTANCE SPORT RATIO	50:1	
EMISSIONITY	ADJUSTABLE : 0.10~1.0	
RESPONSE TIME	<250ms	
SPECTRAL RESPONSE	8~14um	
DIODE LASER	Output <1mW, 630-670nm, Class 2 (I) Laser	
AUTO POWER OFF	AUTOMATICALLY AFTER 20 SECOND	

POWER : 9V (6F22) x 1

Dimension	: H198 x W120 x D59 mm
Weight	: Approx. 286 Gms.
Accessories	: Hard Carry Case, USB Cable & Software, Tripod, TP-01 Temp. Probe, User Manual & Battery
Qty	: 10 Pcs. in a Box.