


929D V

This unit is suitable for desoldering & specialized desoldering applications on through-hole components and other operation. This is especially suitable for desoldering through-hole components with multiple pins (for example: LCD screens, nixie tubes, integrated circuits/microchips, socket pins and more).



Control unit dimensions	L260xW35xH27mm \pm 5mm
Operating ambient temperature	0°C~40°C/32°F~104°F
Nozzle diameter	Φ 1.2mm

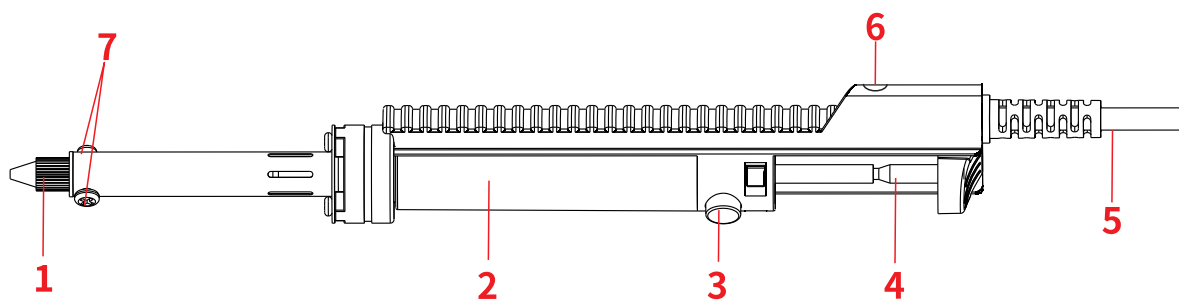

1. Desoldering Nozzle (Consumable Part)
2. Tin Storage Tube
3. Desoldering Button
4. Piston Rod
5. Power Cord
6. Heating Indicator
7. Locking Screw (Heating Element)