

ST-60/ST-80

Digital Soldering Station

Features

- 3 sets shortcut temperature to simplify operations.
- Support temp lock, temp calibration function.
- Smart standby and shutdown function, conserves energy and protect equipment.

Specification


Model	ST-60	ST-80
Voltage	AC 230V±10% 50Hz (110V±10% 60Hz)	
Power	60W	80W
Temperature Range	150°C~480°C	
Heating Principle	Resistance heating	
Handle Model	SP-60	SP-80
Heater	Dual-core ceramic heater HS-3060A	Four-core ceramic heater HS-3080
Soldering Tips	T900 Series	
Tip-to-ground Resistance	≤2Ω	
Tip-to-ground Potential	≤2mV	
Dimension(Main Unit)	175(L)x115(W)x95(H)mm	
Weight(Main Unit)	≈1.28kg	≈1.71kg

Package List

Model	Package List	Package parameters
ST-60	Main unit x1 Power cord x1 Soldering iron handle x1 User manual x1 Iron stand x1 Certificate x1	Inner box package: 315x270x152mm G.W.: ≈2.2kg Outer box package: 555x330x480mm(6 PCS/Carton) G.W.: ≈14.3kg
ST-80		



Replacement of Heating Components

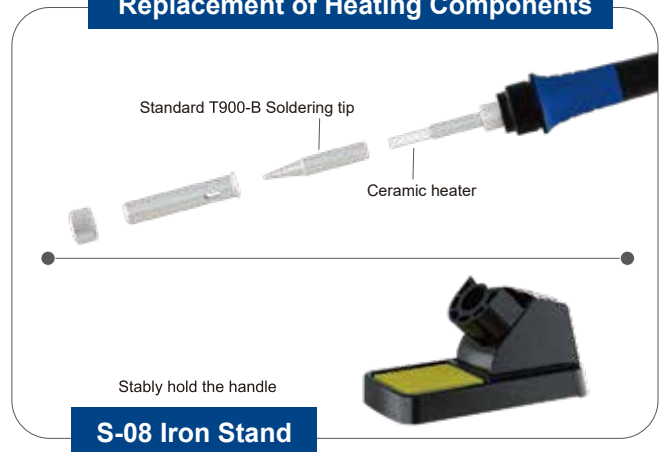

Optional Soldering Tips

T900 (Applicable model: ST-60 ST-80 ST-2065D)

 T900-B	 T900-LB	 T900-SB	 T900-PB	 T900-I	 T900-0.2SI	 T900-SI	 T900-0.5C	 T900-0.8C	 T900-1C
 T900-2C	 T900-3C	 T900-4C	 T900-1.6K	 T900-K	 T900-2.0SK	 T900-SK	 T900-0.2IS	 T900-0.5IS	
 T900-IS	 T900-0.8D	 T900-1.2D	 T900-1.6D	 T900-2.4D	 T900-3.2D	 T900-2.0CM	 T900-3.0CM		