

0 601 081 6K0 – D-TECT 200 C


Material number	0 601 081 6K0
EAN	3165140988124
4 x 1.5 V LR6 battery (AA)	✓
AA1 alkaline battery adapter 1 608 M00 C1B	✓
Cardboard box	✓
Hand strap spare part number 1 609 203 R97	✓
Pouch	✓
USB-C™ Cable 1 600 A01 L6H	✓



Technical data

Technical data

Bosch Radar Technology	yes
Detectable objects	magnetic metals (e.g. iron) non-magnetic metals (e.g. copper) live cables low-voltage & data cables (Three-phase power cables, cavities) non-live cables wooden substructures water-filled plastic pipes Empty plastic pipes
Max. detection depth	200 mm
Detection depth, dry concrete, max.	200 mm
Detection depth, early age concrete, max.	60 mm
Detection depth, other wall types, max.	80 mm
Detection depth, magnetic metal, max.	200 mm
Detection depth, non-magnetic metal, max.	80 mm
Detection depth, live cables, max.	80 mm
Detection depth, wooden substructures, max.	38 mm
Accuracy	±5 mm
Views	Object view Spot view Signal View Signal View 2D
Wall types	Concrete Early age concrete Drywall Brick/Universal Horizontal coring brick Vertical coring brick Panel Heating
Dust and splash protection	IP 5X
Documentation via	USB-C SD-Card
Updatable	yes
Material identification	Magnetic metal Non-magnetic metal Non-metal material Live cable
Power supply	12 V Li-Ion battery 10.8 V-LI ION battery 4 x 1.5 V LR6 (AA)
Weight, approx.	0.64 kg
Additional function	Leakage detection, distance measurement

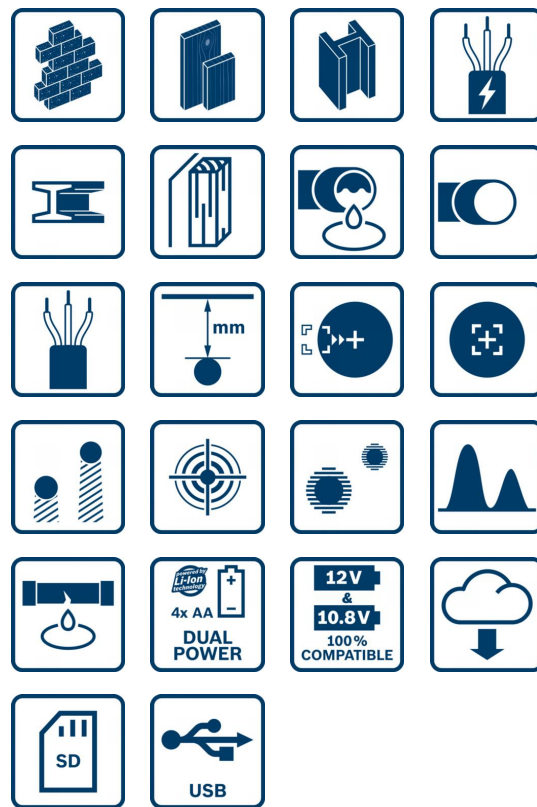

Sales information

Positioning

- Scan and spot the unseen.

User benefit

- More depth for better safety - Increased maximum detection depth to 200mm with object depth indication
- All-round detection - Detection of all common objects, even in narrow spots with the unique spot mode
- See the unseen - Clear visualisation of detected objects including the new leakage detection function through the intuitive HMI