

KIANTECH

### Features:


- Remote control enabled
- Touch panel with timing mode
- Brushless DC motor with built-in controller
- Stable operation, low noise and energy consumption
- Long working life and low maintenance cost
- 3-layer multiple filtration system



## Structure:



# Triple Filtration Effective Purification

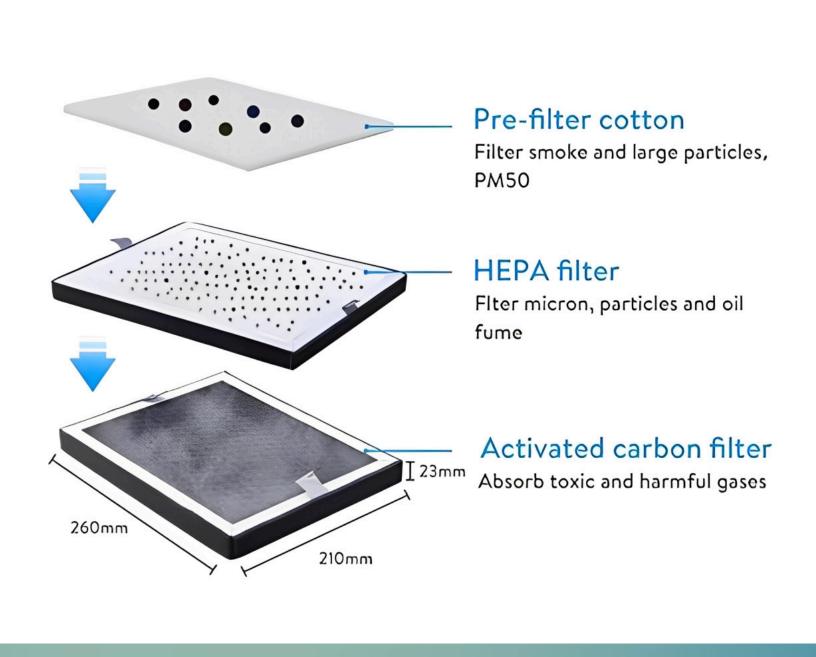

The primary, medium and main filter elements can be replaced separately, which prolongs the service life and reduces the use cost.

### TECHNICAL SPECIFICATIONS

#### INPUT VOLTAGE AC 220V

Power 200W

Joint  $\phi_{75}$ mm\*2

Wind Speed 2\*3m/s

Filter Layers 3 Layers

Noise < 55dB

Smoking pipes (including joints) ¢ 75mm\*L1.4M

Filtration Efficiency > 0.3μm 99.97%

**Dimensions L430**\***W240**\***H420**mm

Air Volume 320m³/h

Weight 20kg

KIANTECH guarantees that the Fume Extractor is free from any defect in material and workmanship

within Two years from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination or improper handling. If you need warranty service within the warranty period, please contact your seller directly. KIANTECH will not be

responsible for any special, indirect, incidental or subsequent damage or loss caused by using this device.



Headquarter REGUS, 7th Floor, Sector 32 Rd Plot No, BW-58, Logix, Noida, Uttar Pradesh 201301 Phone: +91 85952 78578