



FUME EXTRACTOR

PRODUCT BROCHURE- FE2200 -1

Contains the most comprehensive and
high-quality smoke purifier


KIANTECH

Features:

- Remote control enabled
- Touch panel with timing mode
- Brushless DC motor with built-in controller
- Stable operation, low noise and energy consumption
- Long working life and low maintenance cost
- 3-layer multiple filtration system




Structure:

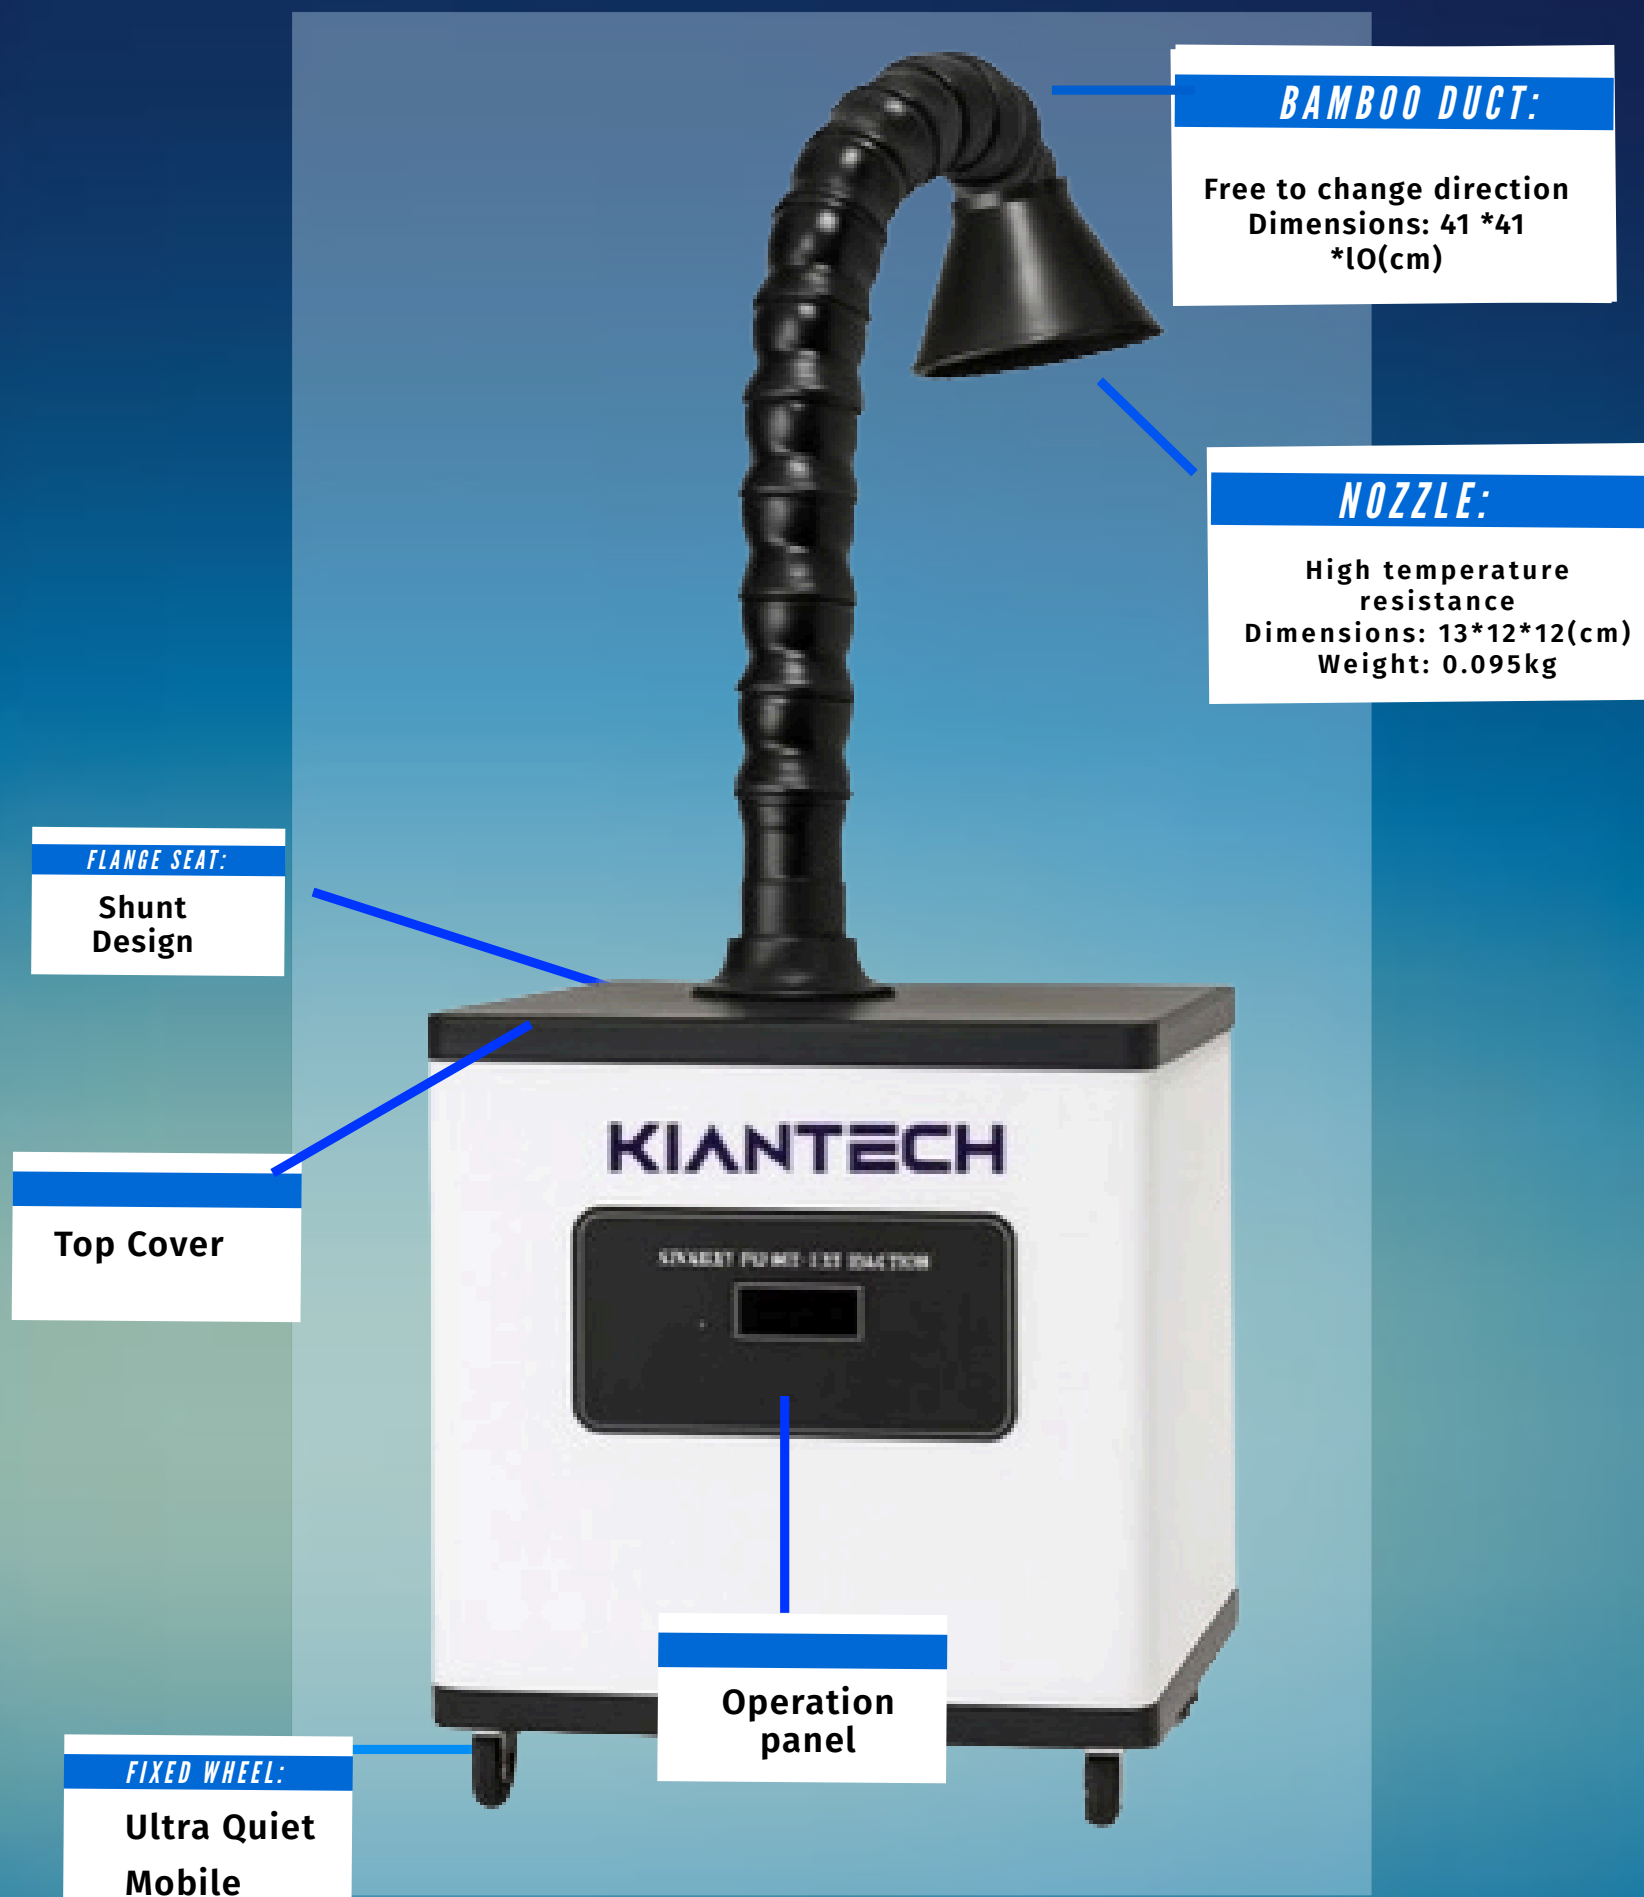

Triple Filtration

Effective Purification

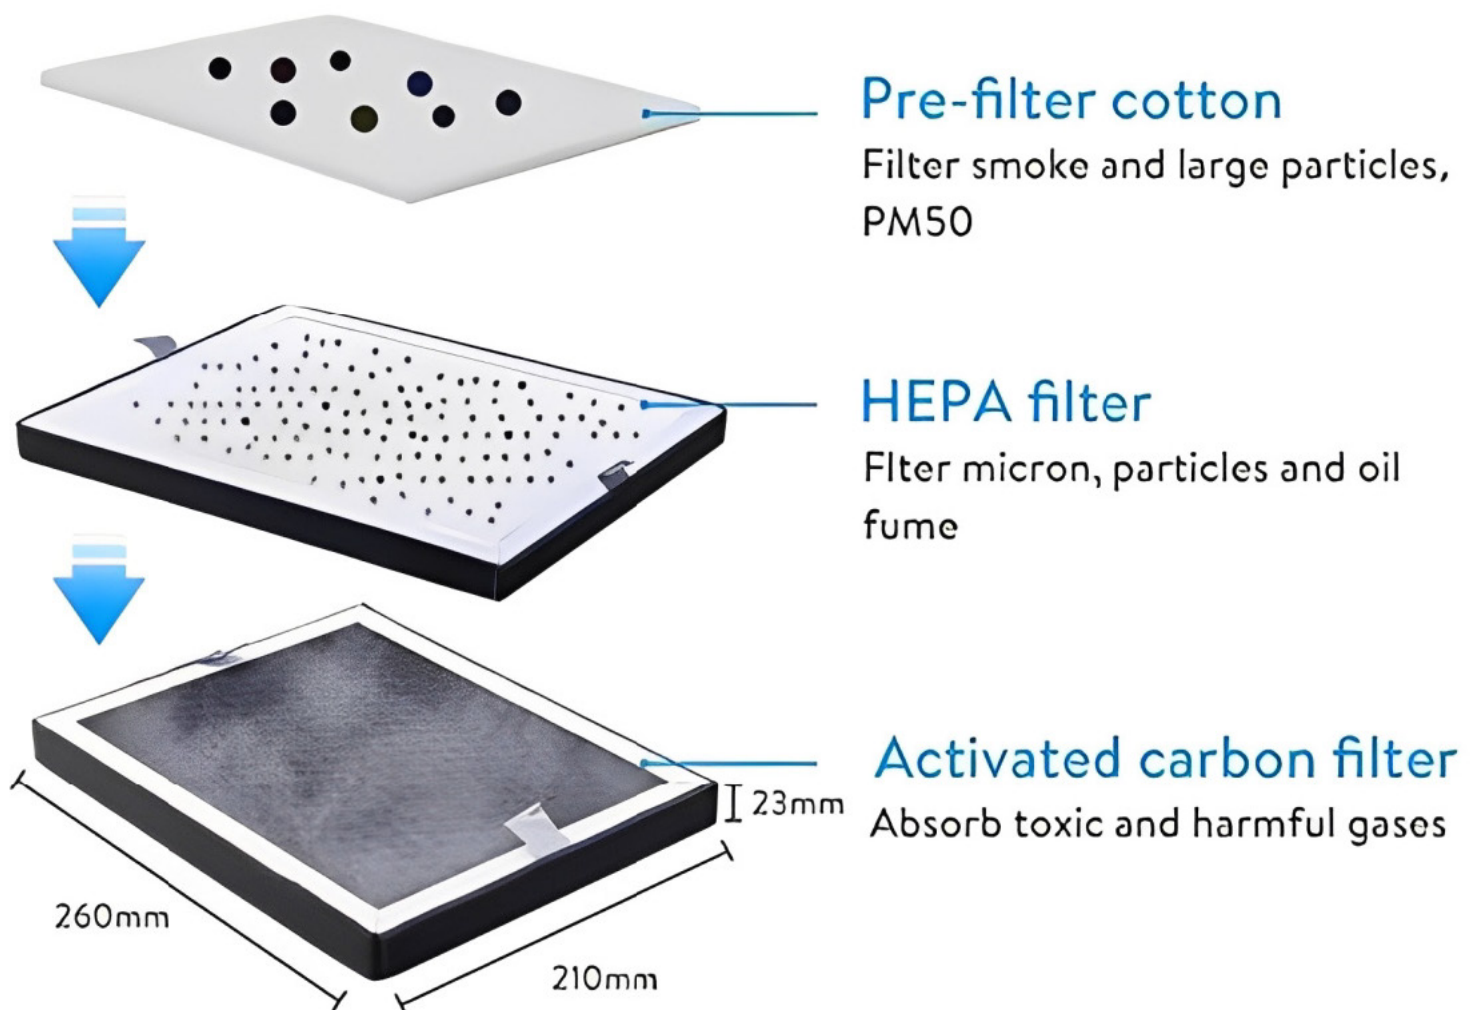

The primary, medium and main filter elements can be replaced separately, which prolongs the service life and reduces the use cost.

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE AC 220V

Power 200W

Joint $\Phi 75\text{mm}$

Wind Speed 3m/s

Filter Layers 3 Layers

Noise <55dB

Smoking pipes (including joints) $\Phi 75\text{mm} * \text{L}1.4\text{M}$

Filtration Efficiency >0.3 μm 99.97%

Dimensions L430*W240*H420mm

Air Volume 320m³/h

Weight 20kg

KIANTECH guarantees that the Fume Extractor is free from any defect in material and workmanship within Two years from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination or improper handling. If you need warranty service within the warranty period, please contact your seller directly. KIANTECH will not be responsible for any special, indirect, incidental or subsequent damage or loss caused by using this device.



**Headquarter
REGUS, 7th Floor, Sector 32 Rd Plot No, BW-58, Logix,
Noida, Uttar Pradesh 201301
Phone: +91 85952 78578**