

0 601 063 M80 – GLL 3-15 X



Material number	0 601 063 M80
EAN	6938032700022
1 x shoulder strap 2 608 000 706	✓
4 x 1.5 V LR6 battery (AA)	✓
Carrying bag	✓



Technical data

Technical data

Laser diode	630 – 650 nm, < 1mW
Operating temperature	-10 – 45 °C
Storage temperature	-20 – 70 °C
Laser class	2
Working range, value	15 m
Working range	15 m
Accuracy	Horizontal laser line: ± 0.2 mm/m* ; Vertical laser lines: ± 0.3 mm/m* (*plus use-dependent deviation)
Working range of laser points, max.	5 m (bottom)
Self-levelling range	$\pm 3^\circ$
Levelling time	4 s
Power supply	4 x 1.5 V LR6 (AA)
Operating time (max.)	24 h
Tripod thread	5/8"
Weight, approx.	0.72 kg
Colour of laser line	red
Color of plumb points	red
Projection	3 lines + 1 plumb point
Plumb point accuracy	± 0.7 mm/m* (*plus use-dependent deviation)

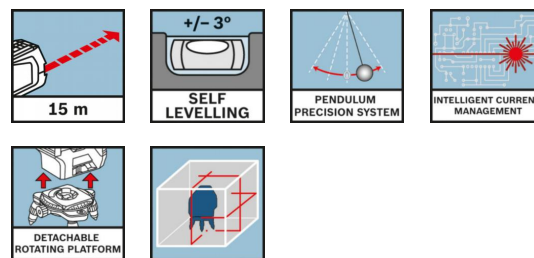

Sales information

Positioning

- For easy decorative interior fitting applications

User benefit

- Maximum precision thanks to the Bosch Pendulum Precision System
- Projection of a vertical and a horizontal line
- Detachable, 360° rotating platform with bubble vial and fine adjustment