

# 0 601 072 YK0 – GLM 100-25 C


Material number	0 601 072 YK0
EAN	4059952617169
3 x 1.5 V LR6 battery (AA)	✓
Manufacturer's certificate	✓
Protective Bag	✓



## Technical data

### Technical data

Laser diode	650 nm, < 1 mW
Measuring range, up to	100,00 m
Measurement range	0.08 – 100.00 m
Laser class	2
Measurement accuracy, typical	± 1.5 mm
Measurement range of incline measurement	0 – 360° (4 x 90°)
Measuring accuracy (typical)	± 0.2* (*plus use-dependent deviation)
Measurement time, typical	< 0.5 s
Measurement time, max.	4 s
Power supply	3 x 1.5 V LR6 (AA)
Automatic deactivation	5 min
Weight, approx.	0.23 kg
Units of measurement	m/cm, ft/inch
Memory capacity (values)	50
Dust and splash protection	IP 54
Tripod thread	1/4"
Digital viewfinder	integrated
Data transfer	Bluetooth™ 4.2 Low Energy
Laser colour	Red

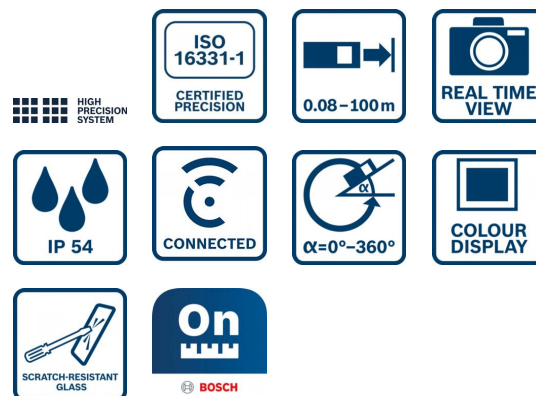

## Sales information

### Positioning

- Precise laser measure for easy indoor and outdoor measuring and documenting

### User benefit

- Accurate, 100-m laser measuring thanks to digital camera viewfinder with zoom function
- Large, high-contrast IPS colour display with flip screen ensures optimal reading
- Laser measure connects via Bluetooth for efficient data documentation

