

0 601 1A0 3F0 – GSB 600


Material number	0 601 1A0 3F0
EAN	4053423240481
Carton box	✓



Technical data

Noise/vibration information

Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level dB(A); Sound power level dB (A). Uncertainty K= dB.
Bit holder	1/2"-20 UNF
Rated input power	600 W
No-load speed, 1st gear	0 – 3,000 rpm
Power output	300 W
Weight	1.7 kg
Tool dimensions (width)	72 mm
Tool dimensions (length)	275 mm
Tool dimensions (height)	270 mm
Impact rate at no-load speed	0 – 48,000 bpm
Drilling diameter in wood	25 mm
Drilling diameter in concrete	13 mm
Drilling diameter in steel	10 / 10 mm
Rated torque	1.4 Nm
Drill spindle connecting thread	1/2"-20 UNF
Chuck capacity, min./max.	1.5 – 13 mm
Drilling diameter in masonry	13 mm
Product category subdivision	Impact Drill

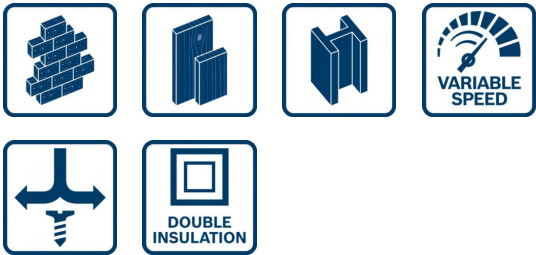

Sales information

Positioning

- Upgraded 13 mm impact drill for even more power

User benefit

- More efficiency with the robust and powerful upgraded 600 W motor
- Better fixation thanks to additional ribs
- Longer usage ensured by improved carbon brush and high-quality design